



SYDNEY XL

_Refrigerators and freezers. Plug-in installation

High storage capacity and robustness.

SYDNEY XL guarantee maximum ease of use and best-possible product presentation. The modern and ingenious exterior design makes shopping an exciting experience.



HIGH VOLUME OF GOODS

Thanks to their front and side glass panels, SYDNEY XL offer best-possible visibility of the goods on display. The smooth-running push-pull lid ensures easy removal of merchandise. Thanks to the height- and width-adjustable product racks, the bright LED lighting and the protective bumper strip with integral price display facility, produce can be presented perfectly.



LOW COSTS

The low investment outlay and operating costs of the robust and resilient cooling units speak for themselves. In addition, the outer-skin condenser on SYDNEY XL provides for completely maintenance-free refrigeration.



HIGH ENERGY SAVINGS

Save even more compared to conventional multi-unit systems, thanks to the sophisticated technology and design with AHT e-conomize. In addition, the electronically controlled, variable-speed compressor (VS) ensures maximum energy efficiency.



ENVIRONMENT AND CLIMATE

SYDNEY XL units are completely CFC- and HFC-free and use the ecologically harmless and natural refrigerant propane (R290). R290 has the lowest GWP on the market. This makes them particularly environmentally friendly.



INTELLIGENT INSTALLATION

Ready-to-connect installation means that SYDNEY XL units can be used immediately. They are available as in-line and end cabinets and impress with their large product storage capacity and handles in various matching colours. They can be easily combined with overhanging KINLEY XL or KINLEY X5 units.



SEMI-AUTOMATIC DEFROSTING

Semi-automatic defrosting is possible in all temperature ranges. The constant temperature and high-quality plastic containers mean that the shelf life and hygiene of all products are always ensured.



COMPATIBLE WITH AMS

Our Active Monitoring System (AMS) allows us to detect problems before you notice them. As an essential add-on to all AHT products, the AMS makes it much easier for you to manage and monitor the AHT cooling systems in your stores.

INDIVIDUAL BRANDING

AHT cooling units are constructed individually: Using our template, you create the design, then we apply it directly during production.



TEMPERATURE RANGES

Cooling	+3°C to +15°C ¹
Freezing	-18°C to -23°C
Mincemeat/meat chilling	0°C to +2°C

¹ Fixed preset that can be changed by a service technician

USPs

EXTRA DEPTH AND LENGTH

Thanks to the dimensions of the SYDNEY XL, this refrigerator and freezer unit provides maximum space for your products. For example, three pizzas fit one behind the other in this unit.

OPTIMUM PRODUCT VISIBILITY

The stylish glass side and front panels provide an excellent view of the unit interior. Together with the bright LED interior lighting, they enable perfect presentation of frozen & cooled products.





STANDALONE UNIT



IN-LINE UNIT



BLOCK INSTALLATION

CONFIGURATIONS

Solo



Row




Block



Island



- _ optionally with end cabinet on both sides
- _ extendible with commercially available shelf attachments

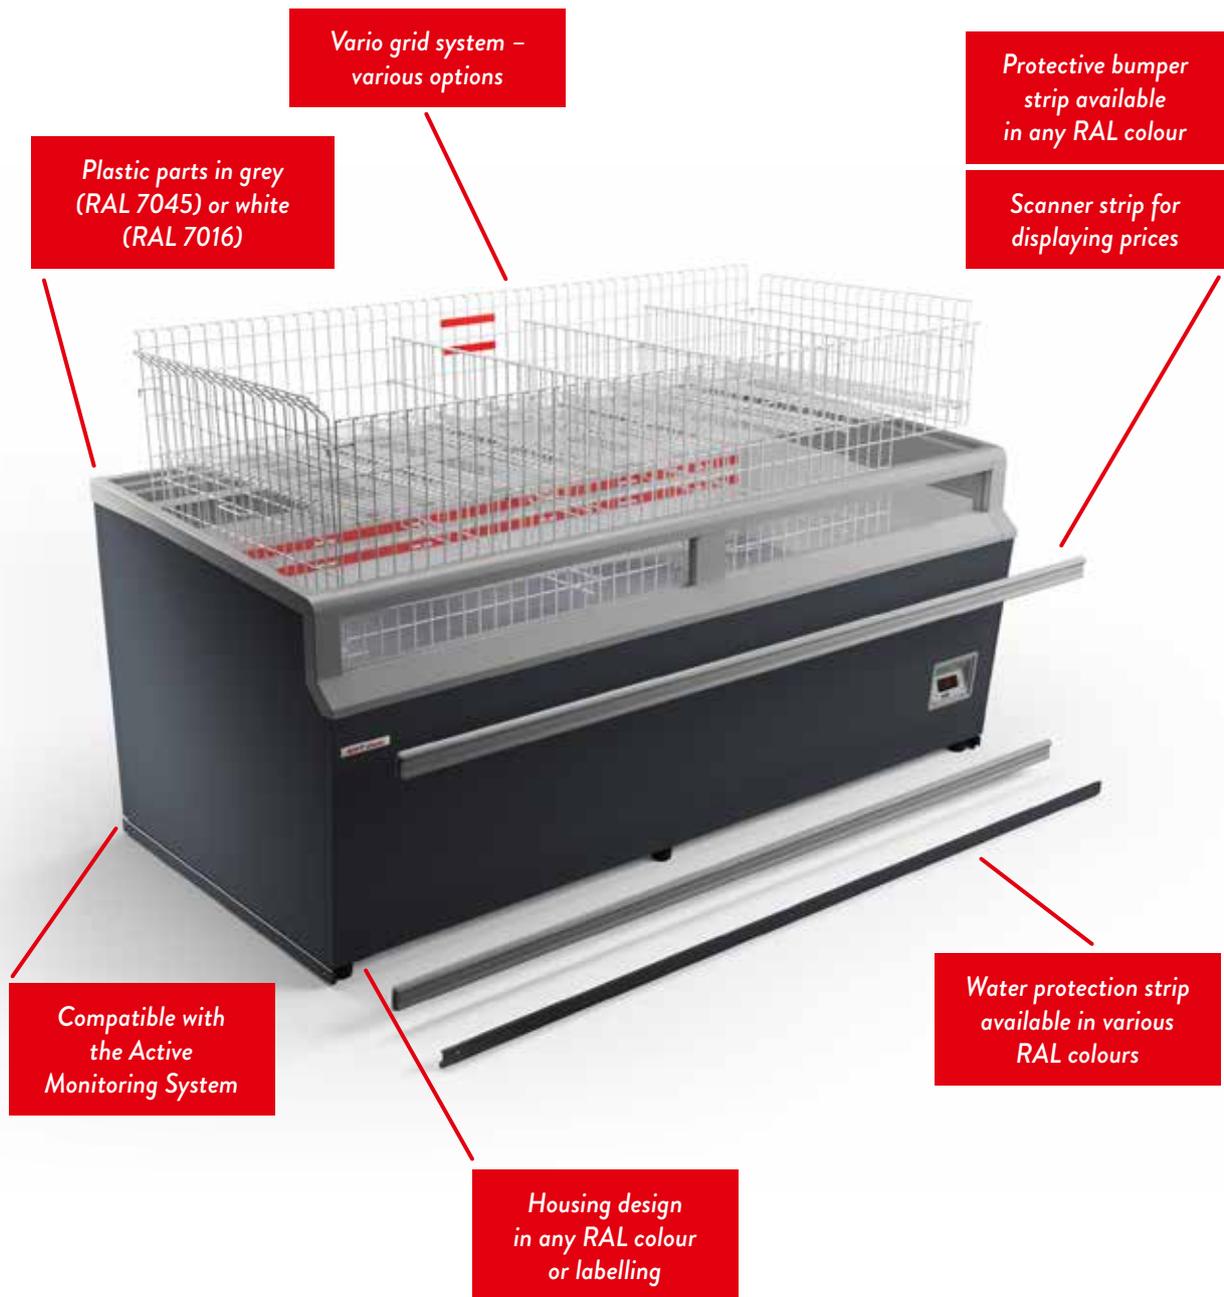


ACCESSORIES

- _ Price display for end cabinet (suitable for high cover)
- _ High cover (between the back-to-back units)
- _ Low cover (between the back-to-back units)
- _ Side cover (closes off the island at the sides)
- _ Water protection strip (colour change on customer request)
- _ Scanner strips
- _ Vario grid system (rack inserts & wire dividers) & wire basket inserts
- _ Impact protection
- _ Handle clips in various colours
- _ Colour and styling options tailored to customer requirements (housing, protective bumper strip, plastic parts in 2 standard colours)
- _ Compatible with the Active Monitoring System (AMS)


SYDNEY EC

213 / 223

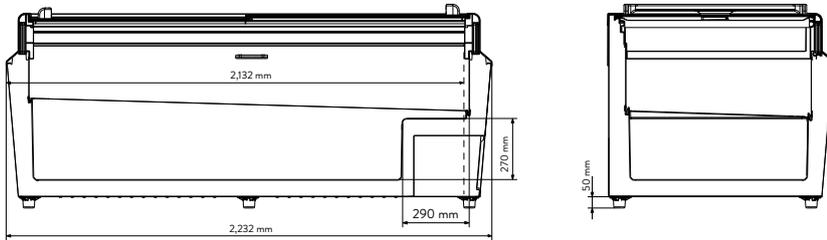

SYDNEY XL

175 / 210 / 250

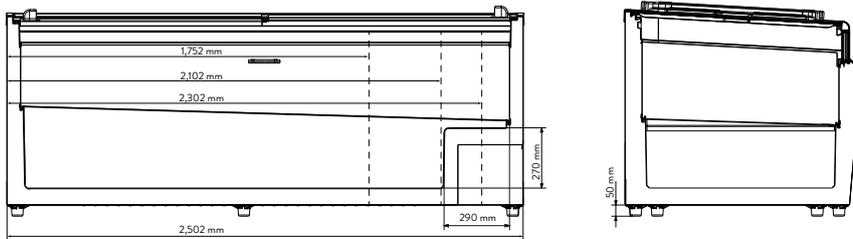

DIMENSIONS

SYDNEY EC / SYDNEY XL		EC 213	EC 223	XL 175	XL 210	XL 250
Length, exterior / interior	mm	2,132 / 1,931	2,232 / 2,031	1,752 / 1,623	2,102 / 1,973	2,502 / 2,373
Depth, exterior / interior	mm	993 / 813	993 / 813	1,043 / 863	1,043 / 863	1,043 / 863
Height, front / rear	mm	860 / 860	860 / 860	860 / 913	860 / 913	860 / 913
Stacking height, front / rear	mm	510 / 510	510 / 510	560 / 560	560 / 560	560 / 560

Subject to technical changes; errors and omissions excepted. Version: 01/2022



AHT Cooling Systems GmbH

Werksgasse 57
 8786 Rottenmann | Austria
 p. +43 3614 24 51-000
 sales@aht.at
 www.aht.at